


1" IMPACT WRENCH | NM.1000F2



Description

- Durable twin hammer mechanism encased in a strong aluminium housing.
- Second handle to help supporting weight.
- One hand forward reverse switch with integrated regulator with 6 positions forward.
- Angled exhaust to blow air away from workstation.
- Feather teasing trigger for optimal speed regulation.
- Socket ring retainer combined with thru-hole for safety.
- Breakaway torque 4068 N.m.
- Breakaway torque 2441 N.m.
- Blows per minute 720 cpm.
- Free speed 4500 tr/min.
- Square drive 1".
- Working pressure 6,2 bar.
- Average air consumption 243 l/min.
- Air inlet 1/2".
- Minimum hose diameter 19 mm - 3/4".
- Vibration 15,20 m/s²/a.
- Vibration 2 m/s²/K.
- Sound pressure 102 dB(A).
- Sound power 113 dB(A).

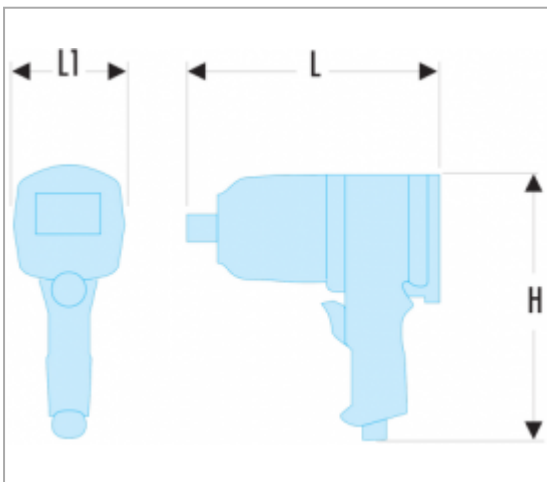

Information

| | |
|---------|------|
| H [mm] | 290 |
| L [mm] | 300 |
| L1 [mm] | 205 |
| [kg] | 10.3 |